


BB-2590 BATTERY EXTREME

A rugged rechargeable lithium-ion battery developed for demanding defence and field operations. Its proven military format provides reliable portable power for communications, sensors, C2 systems and other mission-critical electronics.

Combining dual-voltage capability with smart battery technology, the BB-2590 delivers dependable performance in a compact and robust design, making it well suited for mobile equipment and challenging field environments.

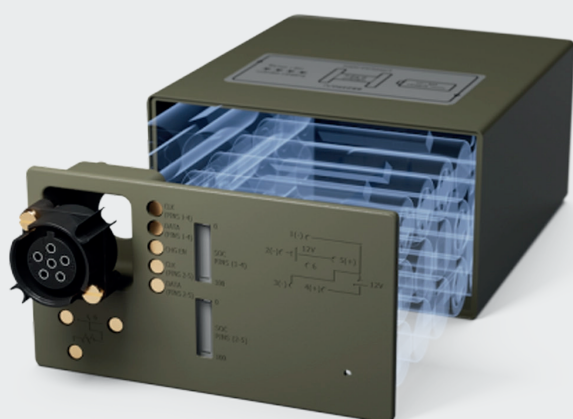

Pack Capacity (12V Mode)	18 Ah
Pack Capacity (24V Mode)	9 Ah
Power (Energy)	259.2 Wh
Energy Density	195 Wh/kg
Operating Temperature (Charge)	-20°C to +70°C
Operating Temperature (Discharge)	-40°C to +80°C
Voltage Range (12V Mode)	10.0–16.8 V
Voltage Range (24V Mode)	20.0–33.6 V
Nominal Voltage (12V Mode)	14.4 V
Nominal Voltage (24V Mode)	28.8 V
End Voltage (12V Mode)	10 V
End Voltage (24V Mode)	20 v
Dimensions (L xW x H)	11 × 6.2 × 12.6 cm
Weight	1.325 kg



EXCLUSIVELY SOLD IN
NORWAY, SWEDEN AND FINLAND
BY EUROHEATER

